

精密线绕电阻器 RX75 系列

Precision Wirewound Resistors
Series RX75


◆产品特点 FEATURES&APPLICATIONS

绝缘性、耐潮湿性能好 Excellent properties of insulation and humidity-proof
高稳定性和高可靠性 Excellent stability and reliability
精度高、低温漂 High precision and low TCR
体积小 Small size


◆执行标准 REFERENCE STANDARDS

GB/T5729-2003、GB5734-85

◆降功耗曲线

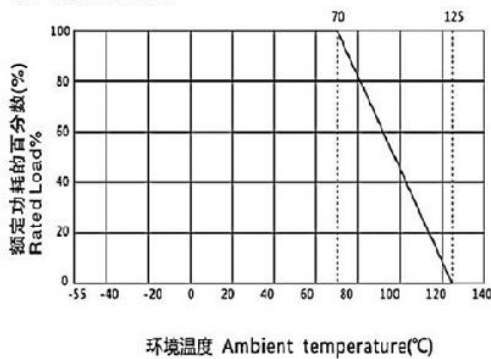

◆外形尺寸 DIMENSIONS

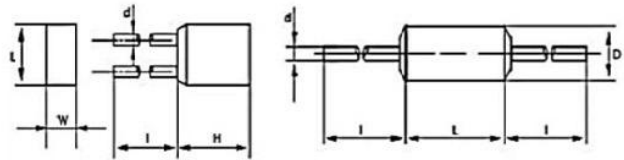

RX75-2

RX75-3

外形尺寸DIMENSIONS						
型号	功率 (W)	L±0.3	W±0.3	H±0.3	l±3	d±0.05
RX75-2	0.125	8	4.5	8	13	0.6
	0.25	8	6	13		
RX75-3	0.125	L±0.3	D±0.3		l±2	d±0.05
		10	3.2			

◆技术说明 TECHNICAL SPECIFICATION

型号TYPE	RX75-2	RX75-2	RX75-3
70℃时额定功率Power Rating at 70℃(W)	0.125	0.25	0.125
极限电压Limiting Element Voltage(V)	75	250	75
绝缘电压Insulation Voltage(V)	100	350	100
阻值范围Resistance Range(Ω)	10R~51K	10R~200k	5.1R~47K
精度范围Tolerance Range	W(±0.05%), B(±0.1%), C(±0.25%), D(±0.5%), F(±1.0%)		
温度系数范围TC-Range(10 ⁻⁶ /K)	C6(±10), C5(±15), C4(±20), C3(±25)		