

高精度线绕电阻器 RX70 系列

High Precision Wirewound
Resistors Series RX70


◆产品特点 FEATURES&APPLICATIONS

绝缘性、耐潮湿性能好 Excellent Properties of Insulation and Humidity-proof
高稳定性和高可靠性 Excellent Stability and Reliability
精度高、低温漂 High Precision and Low TCR


◆执行标准 Reference Standards

GB/T5729-2003、GB5734-85

◆外形尺寸 DIMENSIONS

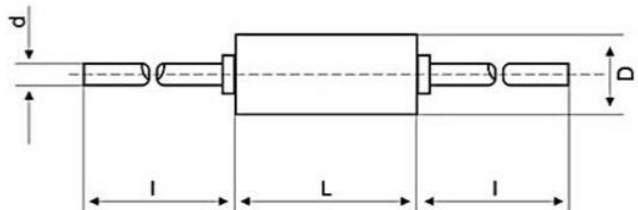

◆降功耗曲线 Derating Curve

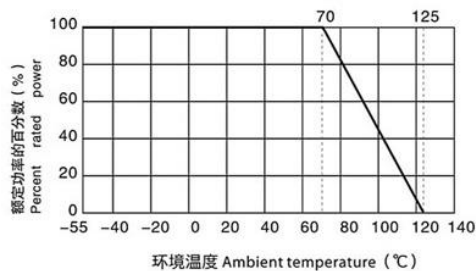

外形尺寸 DIMENSIONS (mm)				
型号	L ± 0.3	D ± 0.3	l ± 3	d ± 0.05
RX70-0.25W	15.5	8	28	0.8
RX70-0.5W	22	12		
RX70-0.75W	27	12		
RX70-1W	27.5	15		
RX70-2W	38	18		
RX70-3W	56	24		

◆技术说明 TECHNICAL SPECIFICATIONS

型号 Type	RX70-0.25W	RX70-0.5W	RX70-0.75W	RX70-1W	RX70-2W	RX70-3W
70℃时额定功率 Rated Power at 70℃(W)	0.25	0.5	0.75	1	2	3
最大工作电压 Max Working Voltage(V)	250	500	500	1000	1000	1000
绝缘电压 Insulation Voltage(V)	350	700	700	1400	1400	1400
阻值范围 Resistance Range(Ω)	1R-500K	1R-1M	1R-2M	1R-4M	1R-5M	1R-10M
精度范围 Tolerance Range	L (±0.01%), P (±0.02%), W (±0.05%), B (±0.1%), C (±0.25%), D (±0.5%), F (±1.0%)					
温度系数范围 (10 ⁻⁶ /K) TC-Range (10 ⁻⁶ /K)	C6 (±10), C5 (±15), C4 (±20), C3 (±25)					