




凤凰电子有限公司

FENGHUANG ELECTRON INC.

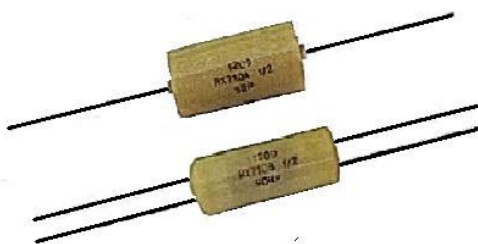

高精密线绕电阻器 RX710系列

High precision Wirewound
Resistors Series RX710


◆产品特点 FEATURES&APPLICATIONS

绝缘性、耐潮湿性能好 Excellent Properties of Insulation and Humidity-proof
高稳定性和高可靠性 Excellent Stability and Reliability
大电流、精度高、低温漂 High current, High Precision and Low TCR


◆执行标准 Reference Standards

GB/T5729-2003、GB5734-85

◆降功耗曲线

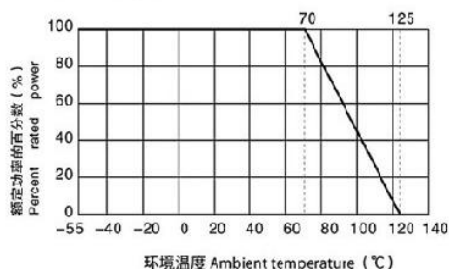

◆外形尺寸 DIMENSIONS

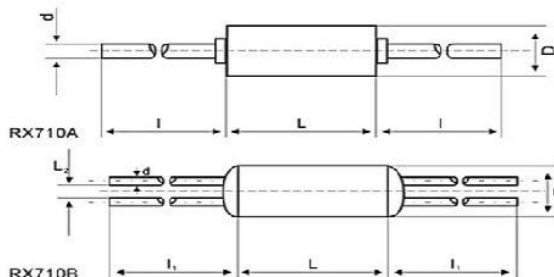

外形尺寸DIMENSIONS (mm)						
型号	功率 (W)	L±0.3	D±0.3	l ₁ ±0.3(B型)	l ₁ ±3	d±0.05
RX710-A RX710-B	0.5	22	12	5	28	0.8
	0.75	27	12	5		
	1	27.5	15	9		
	2	38	18	9		

◆技术说明 TECHNICAL SPECIFICATIONS

型号 YTYPE	RX710-A-0.5W RX710-B-0.5W	RX710-A-0.75W RX710-B-0.75W	RX710-A-1W RX710-B-1W	RX710-A-2W RX710-B-2W
70℃时额定功率 Rated Power at 70℃(W)	0.5	0.75	1	2
最大工作电压 Max Working Voltage (V)	0.05~3	0.1~4	0.1~4	0.1~4
绝缘电压 Insulation Voltage (V)	700	700	1400	1400
阻值范围 Resistance Range (Ω)	0.05~10R	0.05~10R	0.05~10R	0.05~10R
精度范围 Tolerance Range	L (±0.01%), P (±0.02%), W (±0.05%), B (±0.1%), C (±0.25%), D (±0.5%), F (±1.0%)			
温度系数范围 (10 ⁻⁶ /K) TC-Range (10 ⁻⁶ /K)	C6 (±10), C5 (±15), C4 (±20), C3 (±25), C2 (±50)			